

10/100/1000M 8-Port Network Switch (HK-POE3008H)

10/100/1000M 8-Port Network Switch



- ◆ 8* 10/100/1000Mbps auto-sensing RJ45 ports, auto MDI/MDIX.
- ◆ Gigabit non-blocking wire-speed forwarding, keeps network fluent.
- ◆ Full duplex and half duplex, preventing frame loss from port blocking.
- ◆ Auto-detecting of parallel / cross line. Simplify the network structure and maintenance.
- ◆ Store and forwarding mode.
- ◆ Support MAC self learning and updating
- ◆ Support connection with IP Cameras and wireless AP.
- ◆ Plug and play, no need more configuration.
- ◆ Support desktop/wall mounted installation.
- ◆ Low power consumption design. Low power consumption design. Energy-saving and green. Max total power consumption < 6W.

Description

POE3008H is designed as CCTV surveillance Network Switch for simple network environment including home, school dormitory, office and small scale surveillance system etc. Large-capacity cache chip design and full port support wire-speed forwarding mode ensure 7*24 hours stable and smooth for video and data transmission. 8*10/100/1000M auto-sensing RJ45 port. Full duplex rate up to 200M. Auto-identify parallel lines and cross lines. Plug and play, expand high-speed network in a fast way.


A housing made of 0.8 mm galvanized industrial-grade steel plates for excellent durability, heat dissipation performance, ensuring stable switch operation, a long service life, and more reliable outdoor security surveillance. Support desktop/wall mounted installation way. Mini size and fashionable design. Can be connected with any computer, printer, smart TV, NAS, wireless AP, NVR and IP Camera etc.

: Technical Specification

Product Name	8-Port 10/100/1000M Network Switch
Model	HK-POE3008H
Interface	8* 10/100/1000Mbps auto-sensing RJ45 ports(Auto MDI/MDIX)
Network Media	UTP 10Base-T: Cat.3/4/5 (≤100m)
	UTP 100BASE-TX: Cat.5/Above (≤100m)
	UTP 1000BASE-TX: Cat.5e/Above (≤100m)
Forwarding Mode	Store-and-Forward
Forwarding Rate	11.9Mpps
Back-bound Bandwidth	16Gbps
Buffer Memory	4M
MAC Address Table	8K
Standard Protocol	IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE802.3ab, IEEE802.3z
Access Control	CDMA/CD
LED Indicator	1*power LED, 8* Link/Act LEDs
Power Consumption	Standby State: 0.7W. Max power consumption < 6W
Power Input	AC:100~240V;50~60Hz 0.5A
Power Output	9V/1A (External power adaptor)
Dimension	142mm*78.8mm*27mm (L*W*H)
Working Environment	Working Temperature:-20℃~55℃
	Storage Temperature: -40℃~70℃
	Working Humidity: 10%~90% Non-condensing
	Storage Humidity 5%~90% RH (non-condensing)
Certification	CE, FCC, RoHS
Packing List	1*Fast User Guide & 1*Warranty Card
	1*8-Port Network Switch
	1*Power Adaptor (9V/1A)
Warranty	1 Year


10/100/1000M 8-Port Network Switch

Dimension

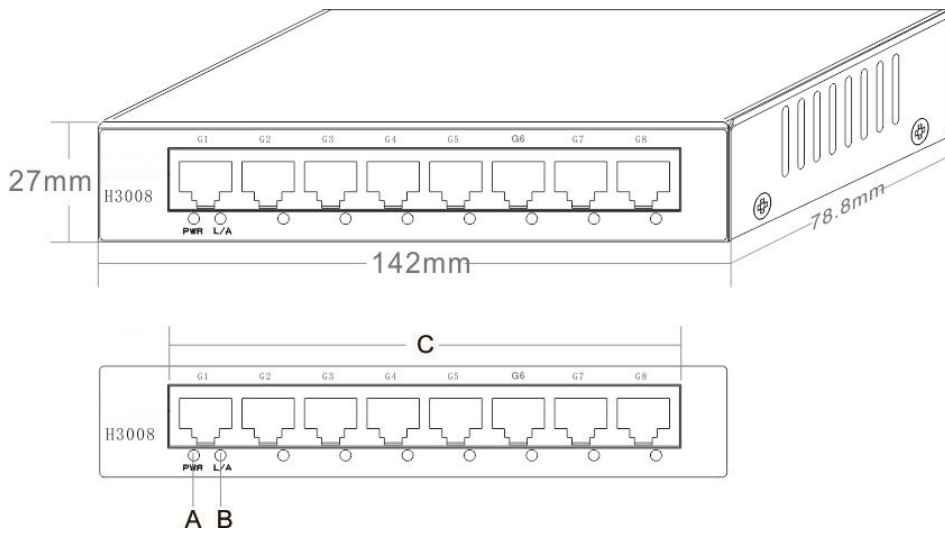

A. PWR Led Indicator B. LINK/ACT Led Indicator C. 5*10/100/1000M RJ45 Ports

Application

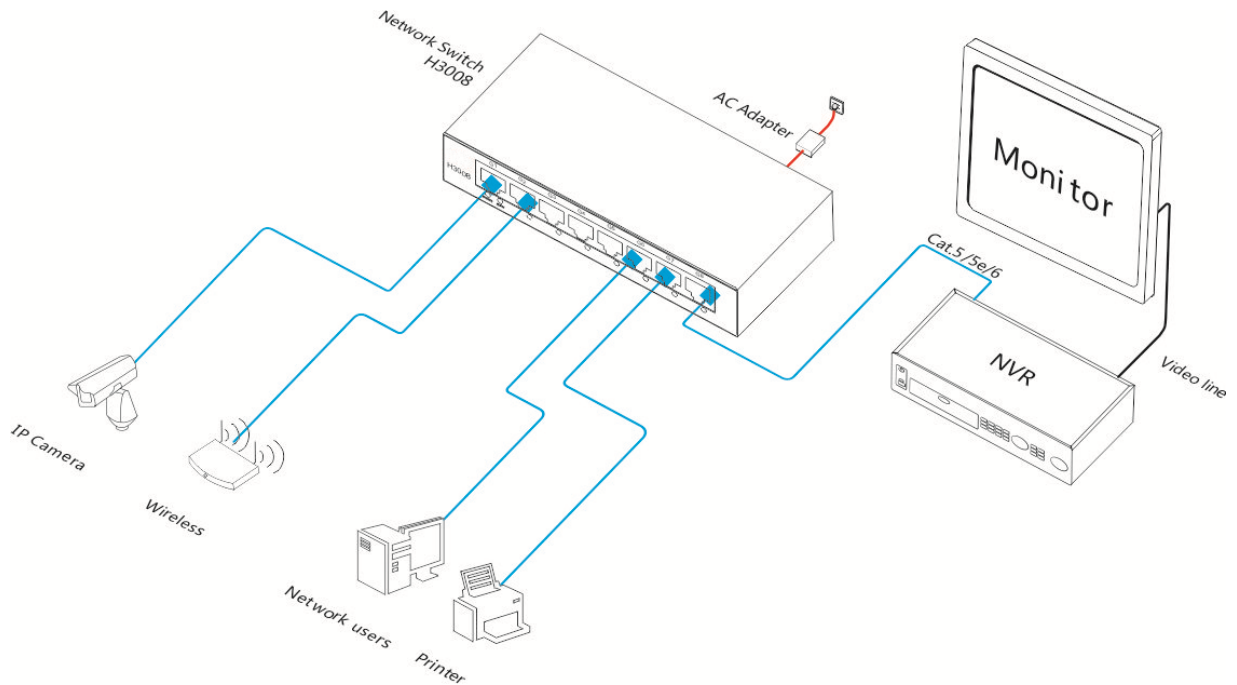

: Ordering Information

Product Model: HK-POE3008H

Description: 8-Port 10/100/1000M Network Switch

: Packing List

Packing List	10/100/1000M 8-Port Network Switch (POE3008H)
	External Power Adaptor
	Fast User Guide
	Warranty Card