

## 10/100/1000M 26-Port Network Switch (HK-POE3226HF)

### 10/100/1000M 26-Port Network



- ◆ 24\*10/100/1000Mbps auto-sensing RJ45 ports + 2\*Gigabit SFP Fiber ports, auto MDI/MDIX.
- ◆ IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE802.3ab, IEEE802.3z.
- ◆ 26\*Link/Act LEDs, showing the connection status in real time.
- ◆ Support 10/100/1000M auto-negotiation for full duplex and half duplex.
- ◆ Store and forwarding mode
- ◆ Support MAC self learning and updating
- ◆ Support connection with IP Cameras and wireless AP.
- ◆ Plug and play, no need more configuration.
- ◆ Support desktop/wall mounted installation.
- ◆ Low power consumption design.  
Energy-saving and green. Max total power consumption < 20W.

### Description


POE3226HF is designed as CCTV surveillance Network Switch for simple network environment including home, school dormitory, office and small scale surveillance system etc. Large-capacity cache chip design and full port support wire-speed forwarding mode ensure 7\*24 hours stable and smooth for video and data transmission. 24\*10/100/1000M auto-sensing RJ45 port. Full duplex rate up to 200M. Auto-identify parallel lines and cross lines. Plug and play, expand high-speed network in a fast way.

A housing made of 0.8 mm galvanized industrial-grade steel plates for excellent durability, heat dissipation performance, ensuring stable switch operation, a long service life, and more reliable outdoor security surveillance. Support desktop/wall mounted installation way. Fashionable design. Can be connected with any computer, printer, smart TV, NAS, wireless AP, NVR and IP Camera etc.

## : Technical Specification


<b>Product Name</b>	26-Port 10/100/1000M Network Switch
<b>Model</b>	HK-POE3226HF
<b>Interface</b>	24*10/100/1000Mbps auto-sensing RJ45 ports + 2*Gigabit SFP Fiber ports (Auto MDI/MDIX)
<b>Network Media</b>	10Base-T: Cat.3/4/5 (≤100m)
	100BASE-TX: Cat.5/Above (≤100m)
	1000BASE-TX: UTP Cat.5e/Above (≤100m)
<b>Forwarding Mode</b>	Store-and-Forward
<b>Forwarding Rate</b>	38.69Mpps
<b>Back-bound Bandwidth</b>	52Gbps
<b>Buffer Memory</b>	4.1M
<b>MAC Address Table</b>	8K
<b>Standard Protocol</b>	IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE802.3ab, IEEE802.3z.
<b>Access Control</b>	CDMA/CD
<b>LED Indicator</b>	1*power LED, 26*Link/Act LEDs
<b>Power Consumption</b>	Max power consumption < 20W
<b>Power Input</b>	AC:100~240V;50-60Hz, 1A Built-in power supply (DC12V/2A)
<b>Dimension</b>	312*178*44mm (L*W*H)
<b>Working Environment</b>	Working Temperature:-20℃~55℃
	Storage Temperature: -40℃~70℃
	Working Humidity: 10%~90% Non-condensing
	Storage Humidity 5%~90% RH (non-condensing)
<b>Certification</b>	CE, FCC, RoHS
<b>Packing List</b>	1*Fast User Guide & 1*Warranty Card
	1*26-Port Network Switch
	1*AC Power Cable
	1*Mounting Kits
<b>Warranty</b>	1 Year

: Dimension

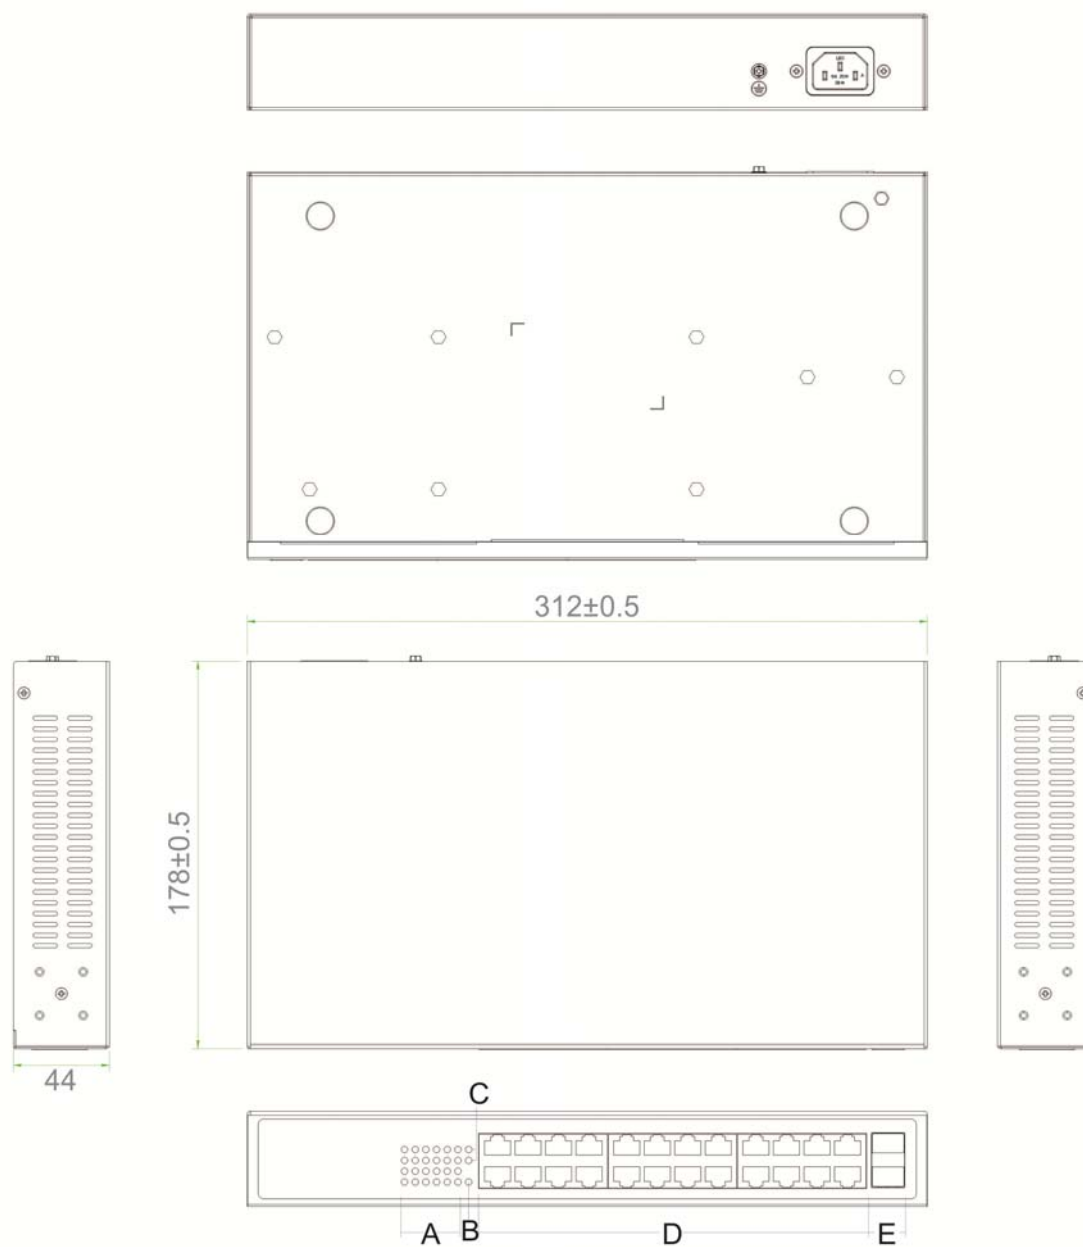

- A. 24\*LINK/ACT LED Indicator for RJ45 Port
- B. PWR LED Indicator
- C. 2\*LINK/ACT LED Indicator for SFP Port
- D. 24\*10/100/1000M RJ45 Ports
- E. 2\*Gigabit Uplink SFP Fiber Ports

: Application

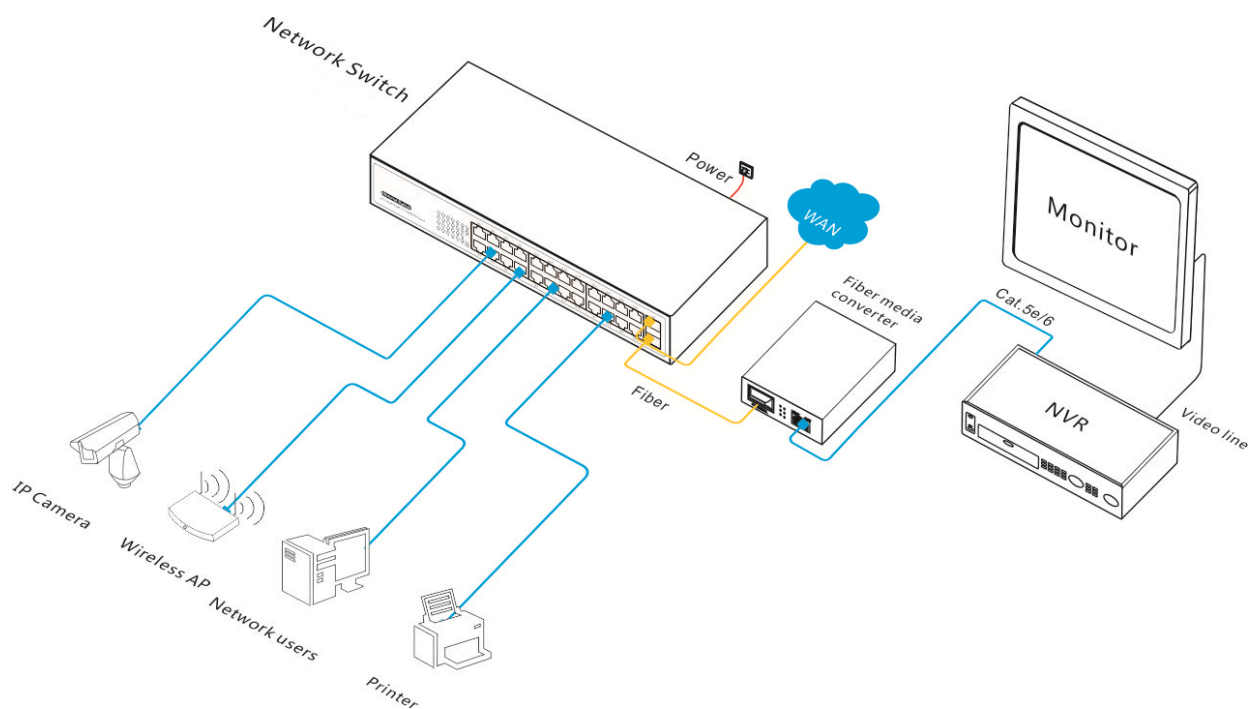

: Ordering Information

**Product Model:** HK-POE3226HF

**Description:** 26-Port 10/100/1000M Network Switch. 24\*10/100/1000M RJ45 Ports + 2\*Gigabit Uplink SPF Fiber Ports

: Packing List

Packing List	10/100/1000M 26-Port Network Switch (HK-POE3226HF)
	AC Power Cable
	User Guide
	Mounting Kits
	Warranty Card