


HK-SD250-(W)(P)(A)-HI

5.0Megapixel H.265 fixed lens IP MINI Camera

Key Features

- ※ 1/2.8" IMX335 Black light illumination CMOS sensor,2592*1944@20fps
Color 0.0001Lux@F1.2,black/white 0.0001Lux@F1.2
- ※ H.265 +(Compatible with H.265/H.264)Support dual stream
AVI;0.1M~8Mpbs variable;1~30f/s variable
- ※ Support 2D/3D noise reduction,digital wide dynamic
- ※ Supporting human detection, face detection, and support to customize other intelligent functions

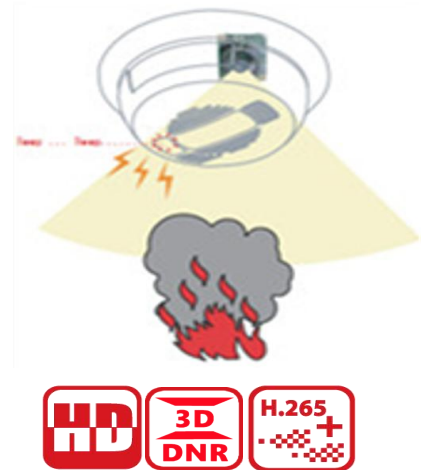

- ※ 3.7mm pinhole 5.0Megapixel lens
- ※ DC 12V power supply (customizable Poe power supply)

- ※ Support ONVIF;access third party, Support various mobile monitoring(iPhone,Android)
- ※ Provide web、CMS、 center platform management software MYEYE,provide SDK development
- ※ Support cloud technology,easy to achieve network penetration,fro in-line and alarm information pushed

Specification

Model		HK-SD250-(W)(P)(A)-HI
Camera	Image Sensor	1/2.8" IMX335 Black light illumination CMOS sensor
	DSP	HI3516EV300
	Min. Illumination	Color: 0.001Lux/F1.2, B/W: 0.0001Lux/F1.2; 0Lux/F1.2(IR on)
	Effective Pixels	2592(H)x1944(V)
	Scanning System	Progressive
	Shutter	1/50(1/60)s to 1/10,000s
	Noise reduction	Support 2D/3D
	Wide dynamic	Support digital
Camera Features	Day/Night	Auto(ICR)/Color/B/W
	Backlight Compensation	BLC / HLC / DWDR
	White Balance	Auto
	Gain Control	Auto/Manual
	Alarm triggered	Motion Detection, occlusion alarm, anomaly
	SMART event	Perimeter breach detected
	Intelligence analysis	Supporting human detection, face detection
Lens	Focal Length	3.7mm pinhole 5.0Megapixel lens
	Max Aperture	F2.0
	Focus Control	Fixed
Video	Video compression	H.265 +(Compatible with H.265/H.264) support dual stream,AVI;0.1M~8Mbps variable;1~30f/s variable
	Resolution	5MP(2592*1944), 4MP(2560*1440), 3MP(2304*1296),2MP(1920*1080); D1(800*448)/CIF(352×288)
	Main Stream	1080P/2MP(1 ~ 25fps)
	Sub Stream	D1/CIF(1 ~ 25fps)
	Bit Rate	H.265 < H.264: 32K ~ 8192Kbps, MJPEG: 32K ~ 20480Kbps
Network	Network interface	1*RJ45 10/100M adaptive Ethernet port; support RTSP/FTP/DHCP/NTP/UPnP etc
	Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
	ONVIF	Support
	Max. User Access	10 users
	Smart Phone	iPhone, iPad, Android, Windows Phone
	Client port	VMS/CMS; XMeye
Auxiliary Interface	Memory Slot	N/A
	Alarm	N/A
	Audio	Optional
General	Power Supply	DC 12V power supply (customizable Poe power supply)
	Power Consumption	<8W
	Working Environment	-30°C~+60°C, 10%~90%
	Ingress Protection	/
	Dimensions	120*120*100mm
	Weight	0.4Kg

Dimensions



TOPCAM TECHNOLOGY LIMITED

ADD:2F,Block 5,No.6,NanLing North Road,BuJI Town,LongGand District,ShenZhen 518000 China

Tel:+86 755 88300549/13927460537

www.topcam.cn